



February 28, 2013  
10:45 AM

# TOE-TO-GO


## Foot-Activated Elevator Call Button

The Toe-To-Go (T2G) foot-activated elevator call button allows activation of hall & car station buttons by shoe, reducing the risk of transferring germs by creating a hands-free experience.




Surface-Mount

- > Hands-Free Activation
- > Robust Durable Design
- > Easy Retrofit for Existing Installation
- > Wire in Parallel to Existing Buttons



Patent Pending

## Dimensions

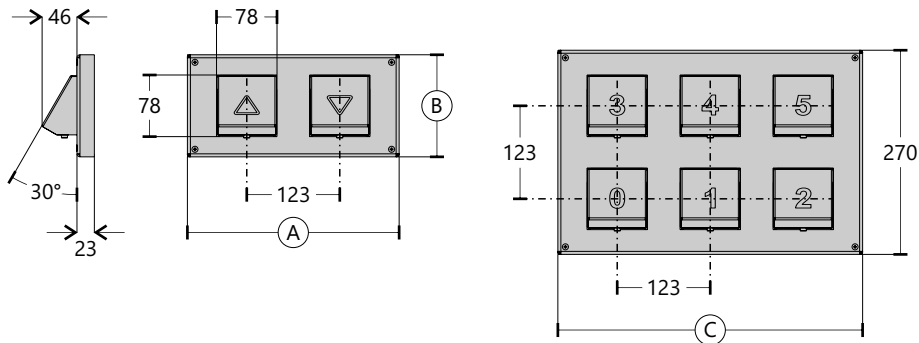

Buttons

	A	B
1	163	135
2	280	135
3	403	135
4	526	135
5	649	135
6	772	135
7	895	135
8	1018	150
9	1141	150

Buttons

	C
6	403
8	526
10	649
12	772

## General Details

- Body:** stainless steel GR 320
- Mounting:** frontal, by visible screws
- Contacts:** 1NO + 1NC/NO, max 120V 1A
- Wiring:** screw terminals
- Avg. life:** 1.500.000 mechanical activations (24V, 20mA)
- Impact protection:** EN 81-71, class 2
- Ingress protection:** IP33

### Wiring Diagram

