



## GUIDE BRAKE USE AND SAFETY RULES




- Always check the validity of the certificate before use.
- Before use, check that the WLL of 2500 kg per clamp is not exceeded.
- Before use, measure the guide rail thickness to determine the correct terminal block:
  - For rails from 12 to 22 mm: small block.
  - For rails from 2 to 12 mm: large block.
- When fastening, tighten the clamping bolt securely.
- When fastening, check whether the bow shackle is properly secured.
- Make sure the bow points downwards when loaded.
- Place the sling as straight as possible below the Guide Brake (see image).



The hook may never be wrapped around the hoist chain.



The sling is placed too far away.

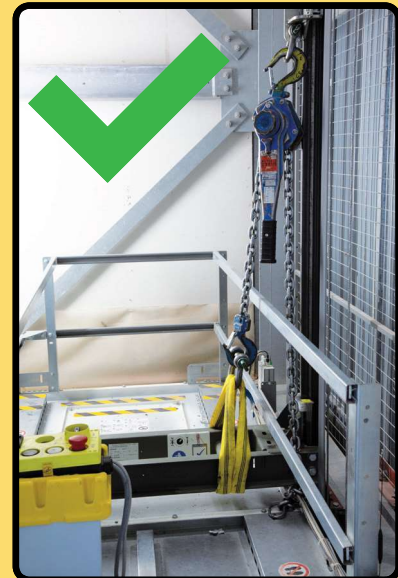

The sling is placed almost perpendicularly below the Brake.

*Note: protect the sling if the beam has sharp edges.*

For help please contact us:  
+46 8-586 272 00  
[order@hissmekano.se](mailto:order@hissmekano.se)