

SMT 3000C AP 5

Thru Beam

Photoelectric Sensors

Compatible Receivers:

SMR 3206 AP 5

SMR 3306 AP 5

SMR 3006 AP 5

SMR 3106 AP 5



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	5 m cable
Sensing Range	6 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	Ø10

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 30 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 10°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polycarbonate
Cable	3 x 0,14 mm ²
Cable Sleeve	PVC Ø 3,4 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g

Operation Temperature	-20 to +50 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals




Wiring Diagram

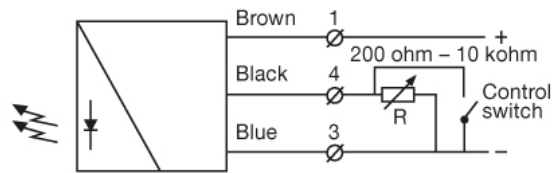



Parallel Displacement

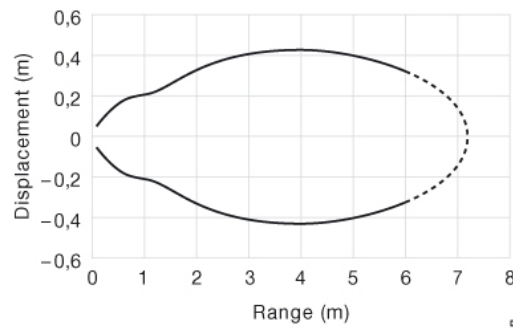

SMT 3000C and SMR 3x06



Angular Displacement

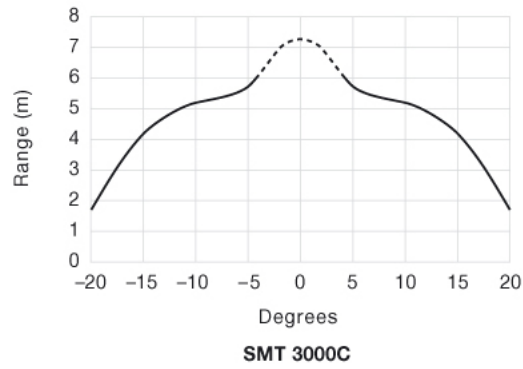

Dimensions

